

LOCTITE WS 200

July 2015

PRODUCT DESCRIPTION

LOCTITE WS 200 provides the following product characteristics:

Application	Soldering
Cure	Reflow
Technology	Water Washable Solder Paste

LOCTITE WS 200 is a water washable solder paste for printing and reflow in air or nitrogen atmospheres where process yield is critical. LOCTITE WS 200 solder paste offers excellent open time and good soldering activity over a wide range of reflow profiles and surface finishes. LOCTITE WS 200 is available with Sn62 and Sn63 alloys.

FEATURES AND BENEFITS

- Effective over a wide range of printer cycle times and print speeds
- Excellent printer open time and between print abandon time
- Long component tack time
- Excellent slump resistance
- Effective over a wide range of reflow profiles in air or nitrogen
- Residues removed with deionised water rinse

TYPICAL PROPERTIES

Solder Paste Typical Properties

Alloys	Sn62, Sn63
Alloy melting range, °C	179, 183
Multicore Powder Size Coding	AGS
ANSI/J-STD-005	Type 3
Powder Particle Size, µm	20-45µ
Metal Loading (Weight %)	88.5
Brookfield Viscosity TF spindle, 25°C, 5rpm after 2 minutes, mPa-s	780,000
Malcom Viscosity at 6 s ⁻¹ @ 25°C, P	1,550
Thixotropic Index (Ti), 25°C (Ti = log(viscosity @ 1.8s ⁻¹ / viscosity @ 18s ⁻¹)	0.68
Slump, J-STD-005, mm <i>RT, 15 minutes</i>	IPC A21 Pattern
0.33 x 2.03 mm pads	0.15
0.63 x 2.03 mm pads	0.33
<i>150°C, 15 minutes</i>	
0.33 x 2.03 mm pads	0.15
0.63 x 2.03 mm pads	0.33
Initial tack force, gF	38.5
Useful open time, hours	>24

Solder Powder:


Careful control of the atomisation process for production of solder powders for LOCTITE WS 200 solder pastes ensures that the solder powder is produced to a quality level that exceeds IPC/J-STD-006 & EN29453 requirements for sphericity, size distribution, impurities and oxide levels. Minimum order requirements may apply to certain alloys and powder sizes. For availability contact your local technical service helpdesk.

DIRECTIONS FOR USE


Reflow:

LOCTITE WS 200 has been formulated for reflow in air over a wide range of temperature profiles. The diagrams below show example reflow profile that have been used successfully. Other profiles may also give good results, depending on board design factors.

Linear Profiles:

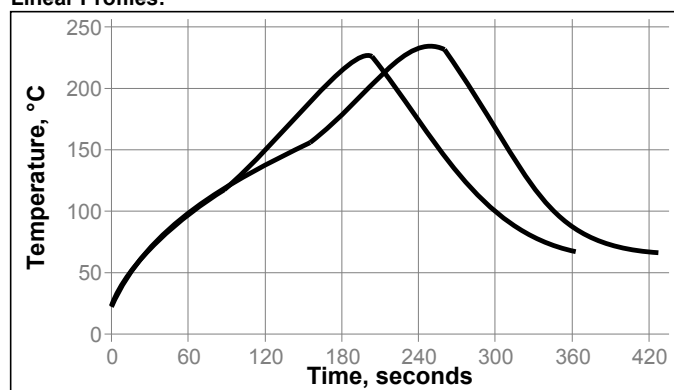

Soak Profiles:

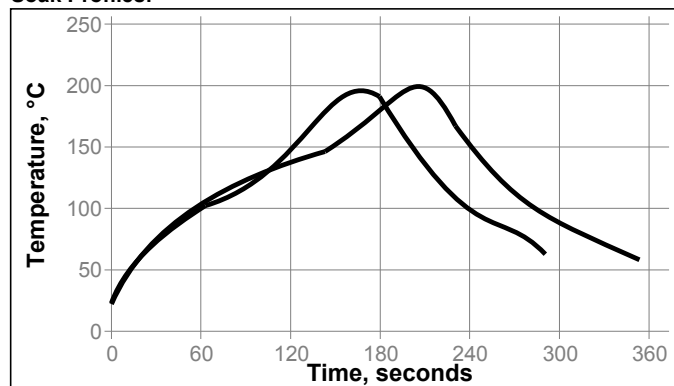

High air flow rates give as even a temperature distribution as possible. However, across the board, this may contribute to exhaustion of paste activity. LOCTITE WS 200 combines excellent printing characteristics with tolerance of hot profiles and high air flow rates, although extreme (long & hot) profiles may still give sub-optimal reflow and cleaning in some oven types.

As with all solder pastes, reflow may be carried out in nitrogen if this is installed and this is likely to lessen the effects of long hot profiles and high gas circulation rates.

Application:

LOCTITE WS 200 solder paste is designed for high volume stencil printing applications with component lead pitches down to 0.4 mm with the AGS (Type 3) powder size. Conventional metal blade squeegees may be used with a contact angle of 60° and sweep speeds of 20 mm sec⁻¹ up to 100 mm sec⁻¹. The best printing performance will be obtained under these conditions. The product can in some cases tolerate slow print cycle times because the material resists drying on the stencil and therefore blocking the stencil apertures. There are various methods for testing the ability of a paste to perform after an extended idle time on the stencil and each can produce different times before printing deteriorates. In a real process environment, the paste has been left idle for more than 1 hour and still produced a perfect first print.

Component Placement:

The paste shows good tack behavior and is capable of holding components in place before reflow. Components may be placed several hours after printing, although this is naturally dependent on the ambient conditions.

Cleaning: LOCTITE WS 200 residues are designed to be removed from assemblies in an aqueous cleaner without the use of any additional chemistries and/or saponifiers. Incomplete removal of the residues can lead to reduced reliability of the device. Hot deionised water is the preferred cleaning agent. Residues are easily removed in batch and in-line aqueous cleaners even up to 3 days after reflow. Cleaning of some assemblies is best conducted in an ultrasonic bath. Tap water is not recommended for rinsing since ionic impurities present in tap water can lead to reduced reliability of the assembly.

RELIABILITY PROPERTIES**Solder Paste Medium:**

LOCTITE WS 200 medium contains a stable resin system and includes solvents with high boiling ranges. The formulation has been tested to the requirements of the J-STD-004 and Telcordia (formerly known as Bellcore) specifications.

Test	Specification	Results
Surface Insulation	ANSI/J-STD-004	Pass
Resistance (with cleaning)	Telcordia GR-78-Core	Pass
Electromigration (cleaned)	Telcordia GR-78-Core	Pass

PACKAGING

Containers: LOCTITE WS 200 is supplied in:

- 500g plastic jars with an air seal insert
- 650g and 1300g Semco cartridges

Other packaging types may be available on request; please contact your local technical service helpdesk for assistance.

Shelf Life:

Provided LOCTITE WS 200 is stored tightly sealed in the original container at 0 to 10°C, a minimum shelf life of 6 days can be expected. Air shipment is recommended to minimize the time the containers are exposed to higher temperatures.

LOCTITE WS 200 solder paste has been formulated to reduce separation on storage to a minimum but should it occur, gentle stirring for 15 seconds will return the product to its correct rheological performance.

DATA RANGES

The data contained herein may be reported as a typical value and/or a range. Values are based on actual test data and are verified on a periodic basis.

GENERAL INFORMATION**Not for Product Specifications**

The technical information contained herein is intended for reference only. Please contact Henkel Technologies Technical Service for assistance and recommendations on specifications for this product.

Disclaimer**Note:**

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Corporation, Resin Technology Group, Inc., or Henkel Canada Corporation, the following disclaimer is applicable:

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, **Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Reference 0.2